



บริษัท นีโอนิกส์ จำกัด

### Functions

- 1. It is designed according to the IEC651 TYPE2 & ANSI S1.4 TYPE2
- 2. Modern, compact, portable design
- 3. Accuracy up to  $\pm 1.5$  dB
- 4. Measurement range: 30dBA-130 dBA
- 5. MAX/MIN Hold
- 6. Auto backlight display
- 7. Auto power OFF




### Specification

Measuring range	30dBA~130dBA
Accuracy	$\pm 1.5$ dB (94dB@1KHz)
Frequency range	31.5Hz~8KHz
Frequency weighting	A
Digital Display	4digits
Resolution	0.1dB
Sample rate	2 times/second
Microphone	1/2 inch electret condenser microphone
Power supply	9V Battery
Power life	About 30 hours (alkaline battery)
Operating condition	0~40°C, 10~80%RH
Storage condition	-10~60°C, 10~70%RH
Weight	144g
Dimension	57*26*149mm

### LCD Display

- 1. Low battery indication
- 2. Measuring Value
- 3. Maximum value icon
- 4. Measuring unit: dBA
- 5. Minimum value icon

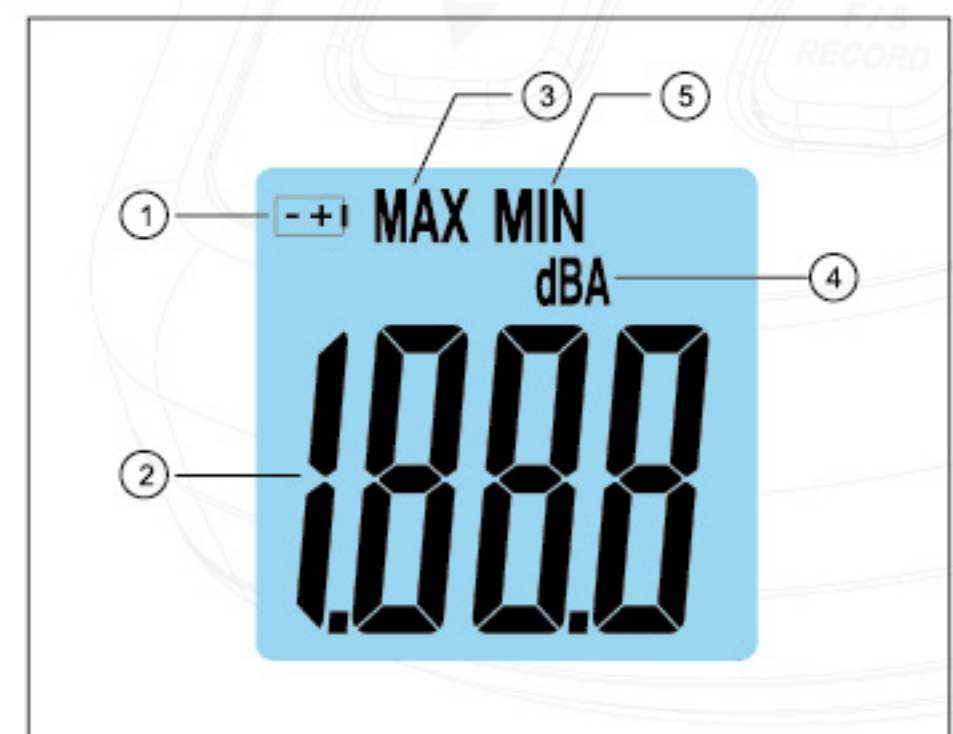

LINE ID: @neonics

