




MX-RD-Pro LCD Digital Rotator

Our rotators give gentle but effective mixing of biological samples to be held in 1.5mL to 50mL micro tubes, used in a variety of applications including immune precipitations, prevention of blood coagulation, latex diagnostics etc.




MX-RD-Pro

LCD Digital Rotator

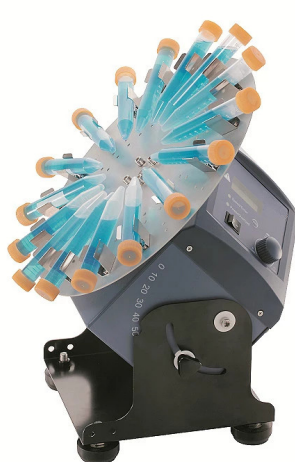

MX-RD-Pro

With dish accessory

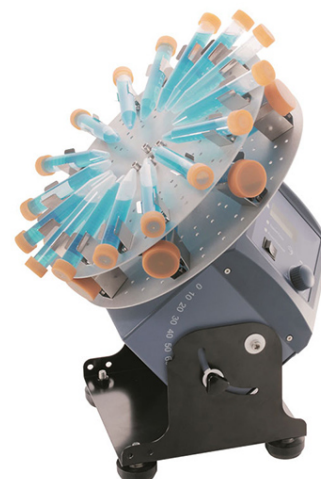

MX-RD-Pro

With dual dish accessories and support rods



SPECIFICATION	MX-RD-Pro
Voltage [VAC]	100-240
Frequency [Hz]	50/60
Power [W]	40
Motor type	DC motor
Tilt angle [o]	0-90
Speed range [rpm]	10-70
Speed display	LCD
Timer	Yes
Timer display	LCD
Time setting range [min]	1-1199
Operation type	Continuous / timed operation
Dimensions [D×W×H mm]	280×210×300(MX-RD-Pro)
Weight [kg]	8
Permissible ambient temperature [°C]	5-40
Permissible relative humidity	80%
Protection class acc. To DIN EN60529	IP21

Accessories



Cat. No:18900160

Used for MX-RD-Pro
Disk accessory, for 1.5mL x
60 centrifuge tubes holder



Cat. No:18900161

Used for MX-RD-Pro
Disk accessory, 15mL x 16
centrifuge tubes holder



Cat. No:18900162

Used for MX-RD-Pro
Disk accessory, 50mL x 8
centrifuge tubes holder



Cat. No:18900140

Disk support rods,
4 pcs, use with disk
accessories

ติดต่อบริษัท เนโอเนิกส์ จำกัด

Tel: 02-077-7602 หรือ 061-8268939

E-mail: sale@neonics.co.th เว็บไซต์ www.neonics.biz