

NEW




WT81

WT81B(Bluetooth type)



Bluetooth

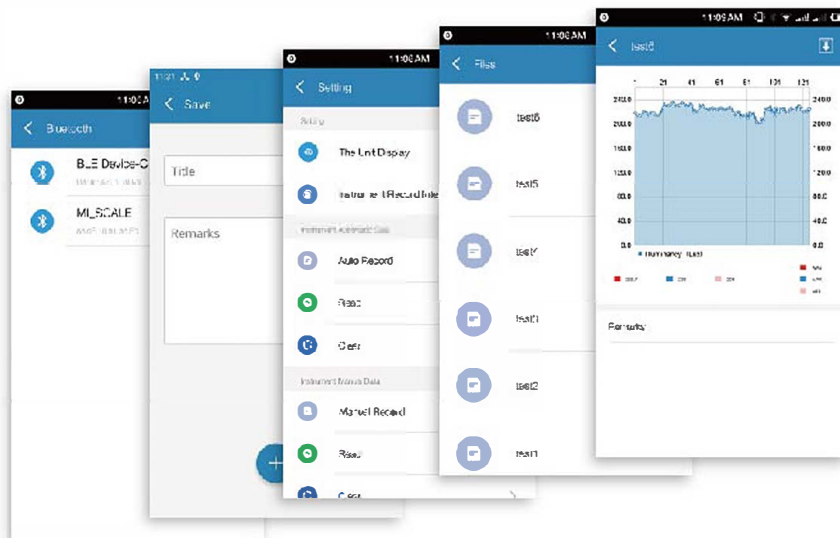

The digital luxmeter is a professional instrument for measuring illumination and brightness, which can be used in light intensity measurement engineering, quality control, illness prevention and treatment and measurement of light intensity in all kinds of environments such as factories, schools, offices, transportation routes, families, etc.

Pecularity

- ▶ Measure current illumination and temperature.
- ▶ Measure difference value, max value and min value.
- ▶ Switch between illumination and temperature unit.
- ▶ The measurement range is (0~200000) lux, auto switch of measurement gear.
- ▶ Automatic storage and manual storage of illumination data.
- ▶ Setting of automatic power off.
- ▶ Backlight and data holding.
- ▶ The digital luxmeter is equipped with APP which passes through Bluetooth, so as to facilitate all kinds of operations on the digital luxmeter (For the bluetooth version only).

Technical Parameters (App is just for the bluetooth version only)	
Measuring function	Illumination and temperature, difference value, max value, min value of illumination
Main parts of photometer head	Photodiode+cosines corrector+correction filter
Temperature probe	NTC thermistor
Illuminance measuring range	Total measuring range: 0~200,000 Lux, into four ranges x1: 0~199.9 Lux x10: 200~1999.9 Lux x100: 2000~19999.9 Lux x1000: 20000~200000 Lux
Temperature measuring range	-9.9°C ~ 49.9°C
Illuminance accuracy	±3%rdg (below 10000 Lux); ±4%rdg (above 10000 Lux)
Temperature accuracy	±1.0 °C
Units of illuminance and temperature	Four combinations of units are available. Lux/°C Lux/°F FC/°C FC/°F
Storage of illumination data	Automatic storage
	Manual storage
Operating temperature/humidity	0 ~ 40°C, 10 ~ 90%RH
Storage temperature/humidity	-10 ~ 50°C, 10 ~ 90%RH
LCD screen update	2 times/s
Power source	3* 1.5V AAA batteries
Battery life	About 200 hours (consecutive working time without turning on Bluetooth and backlight)